

# SonicWave Series Wireless Access Points

Secure, cloud-managed wireless solutions

SonicWall SonicWave series wireless access points (APs) combine high-performance IEEE 802.11ac Wave 2 wireless technology with flexible deployment options. These APs can be managed via the cloud using SonicWall WiFi Cloud Manager (WCM) or through SonicWall's industry-leading next-generation firewalls. The result is a solution that could be untethered from the firewall to provide a superior experience for WiFi users that's as secure as any wired connection.

The SonicWave solution is based on:

- SonicWall SonicWave series indoor and outdoor APs which support the 802.11ac Wave 2 wireless standard
- SonicWall WCM is an intuitive, cloud-managed WiFi network management system suitable for networks of any size
- SonicWall TZ, NSA, NSsp, NSA and SuperMassive firewalls, which use deep packet inspection technology to detect and eliminate threats over wired and wireless networks

## Intuitive cloud management

SonicWall WCM provides an intuitive user interface to manage all SonicWave APs from a single pane of glass via SonicWall Capture Security Center (CSC). Easily monitor and manage networks with alerts and rich analytics updated in real-time. Always stay up-to-date with the current features and enhancements from the latest firmware. Updates are pushed automatically to APs, eliminating manual updates and chances of human error.

## Enhanced user experience

SonicWave APs take advantage of the capabilities in 802.11ac Wave 2 and advanced RF capabilities to deliver high-speed wireless performance. MU-MIMO technology allows the APs to communicate to multiple client devices at the same time, improving the overall network performance, efficiency and user experience. In combination, mesh technology supported on SonicWave APs enables ease of installation and deployment. Mesh networks are easy to set up, effortless to expand, and require fewer cables and less manpower to deploy, reducing installation costs.

With multiple transmitting and receiving antennas, SonicWave APs are engineered to optimize signal quality, range and reliability for wireless devices. SonicWave APs supports fast roaming, so that users can roam from one location to another seamlessly. Feature-rich portfolio includes air-time fairness, band steering, and signal analysis tools for monitoring and troubleshooting.

## Best-in-class wireless security

SonicWall firewalls scan all wireless traffic coming into and going out of the network using deep packet inspection technology and then remove harmful threats such as malware and intrusions, even over SSL/TLS encrypted connections. Other security and control capabilities such as content filtering, application control and intelligence and Capture Advanced Threat Protection (ATP) provide added layers of protection.

## Benefits:

- Intuitive cloud management
  - Alerts and rich analytics
  - Automatic firmware updates
- Enhanced user experience
  - 802.11ac Wave 2
  - Auto channel selection
  - RF spectrum analysis
  - AirTime Fairness
  - Fast roaming
- Best-in-class wireless security
  - Dedicated third scanning radio
  - Capture ATP and content filtering service
  - Deep packet inspection technology
  - SSL/TLS decryption and inspection
  - Wireless intrusion detection and prevention
- Simplified firewall management
  - Auto-detection and provisioning
  - Wireless signal analysis tools
  - Single-pane-of-glass management
- Zero-Touch Deployment powered by SonicWiFi app
  - Easy registration and onboarding
  - Auto-detection and auto-provisioning
  - App available on iOS and Android
- Design with WiFi Planner
  - Advanced wireless site survey
  - Cloud-based tool
- Ruggedized outdoor design
  - IP67 rated
  - Industrial-grade enclosure

Capture ATP is our award-winning multi-engine sandboxing service that features SonicWall's patent-pending Real-Time Deep Memory Inspection (RTDMI™) technology. The RTDMI engine of Capture ATP proactively detects and blocks mass market, zero-day threats and unknown malware by inspecting directly in memory. Because of the real-time architecture, SonicWall RTDMI technology is precise, minimizes false positives, and identifies and mitigates sophisticated attacks where the malware's weaponry is exposed for less than 100 nanoseconds. SonicWave APs perform advanced security services, including the Content Filtering Service (CFS) and Capture ATP sandbox service independently — even where firewalls are not deployed.

Most SonicWave APs includes three radios, where the third radio is dedicated to security and performs rogue AP detection, passive scanning and packet capturing. The SonicWave solution also integrates additional security-related features including wireless intrusion detection and prevention, virtual AP segmentation, wireless guest services, RF monitoring and wireless packet capture.

### Simplified firewall management

Deployment and setup of APs are greatly simplified, reducing total cost of ownership. Optionally, SonicWave APs can be managed by SonicWall next-gen

firewalls. Integrated into every SonicWall firewall is a wireless controller that auto-detects and auto-provisions SonicWave APs across the network.

Management and monitoring for wireless and security are handled centrally through the firewall or through SonicWall Global Management System, providing network administrators with a single pane of glass from which to manage all aspects of the network.

### Zero-Touch Deployment (ZTD) powered by SonicWiFi app




Easily register and onboard SonicWave APs with the help of SonicWall SonicWiFi mobile app. The APs are automatically detected and provisioned with Zero-Touch Deployment. Available on iOS and Android, SonicWiFi mobile app lets network admins monitor and manage networks, or set up mesh.

### Design with WiFi Planner


SonicWall WiFi planner is a cloud-based, advanced wireless site survey tool that enables to optimally design and deploy a wireless network for enhanced wireless user experience.

### Ruggedized outdoor design


SonicWave outdoor APs are built to withstand rough outdoor conditions with industrial-grade enclosure. These APs are IP67 rated, which ensures protection against dust and water immersion.

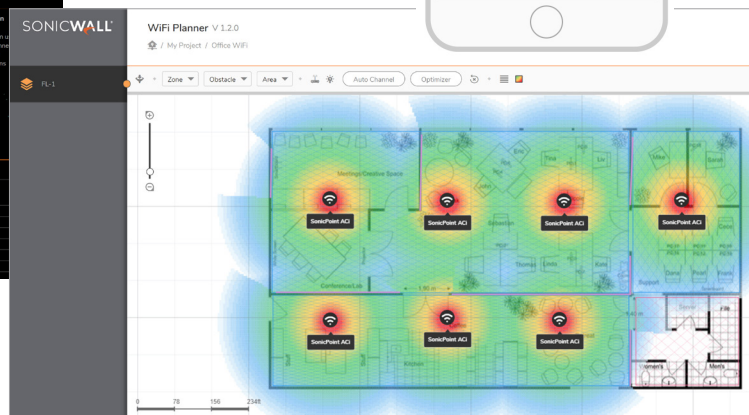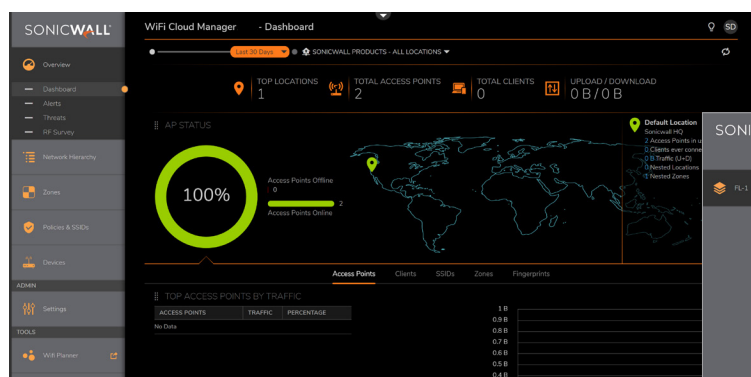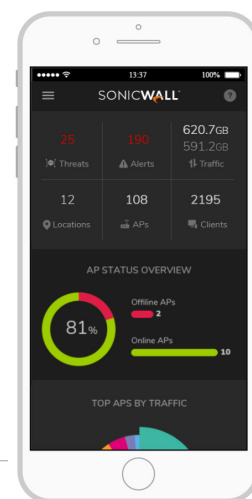


SonicWave 231c – The Ceiling Mount AP

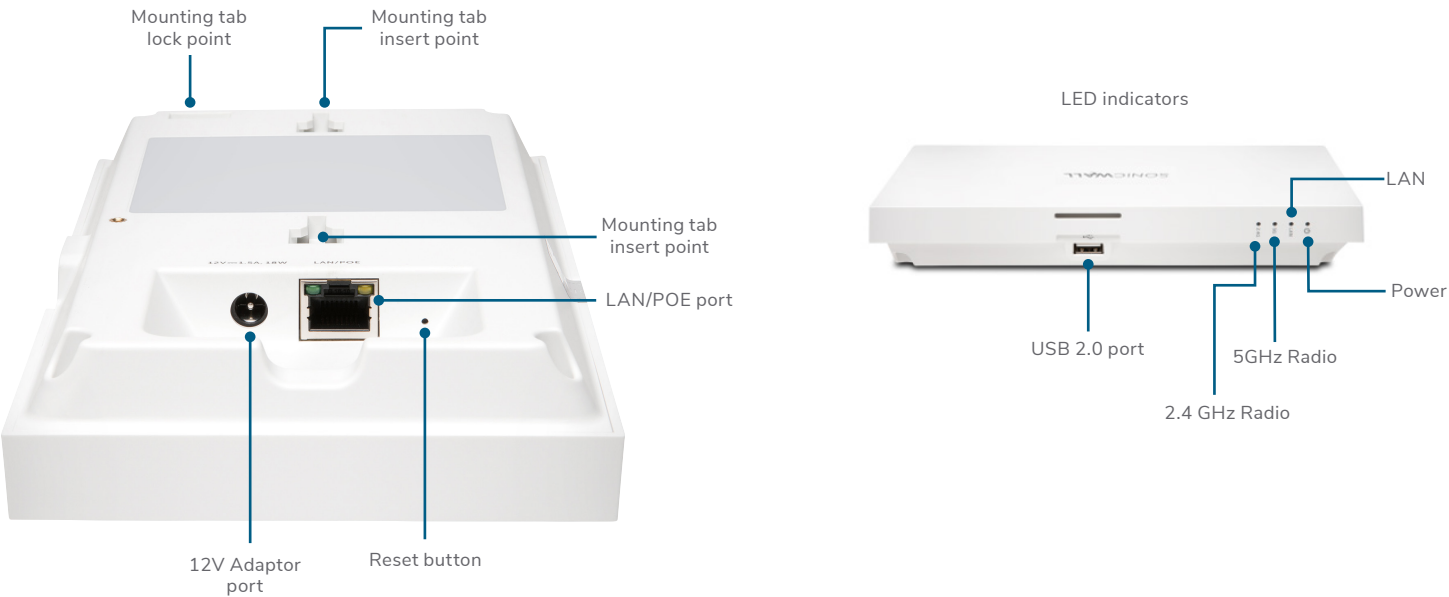


RF coverage maps

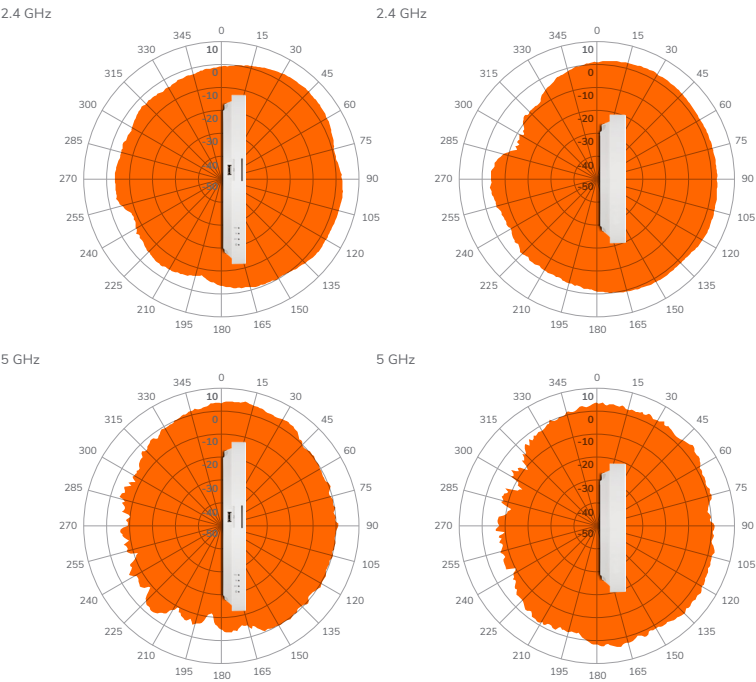


## SonicWave 224w – The Wall Mount AP

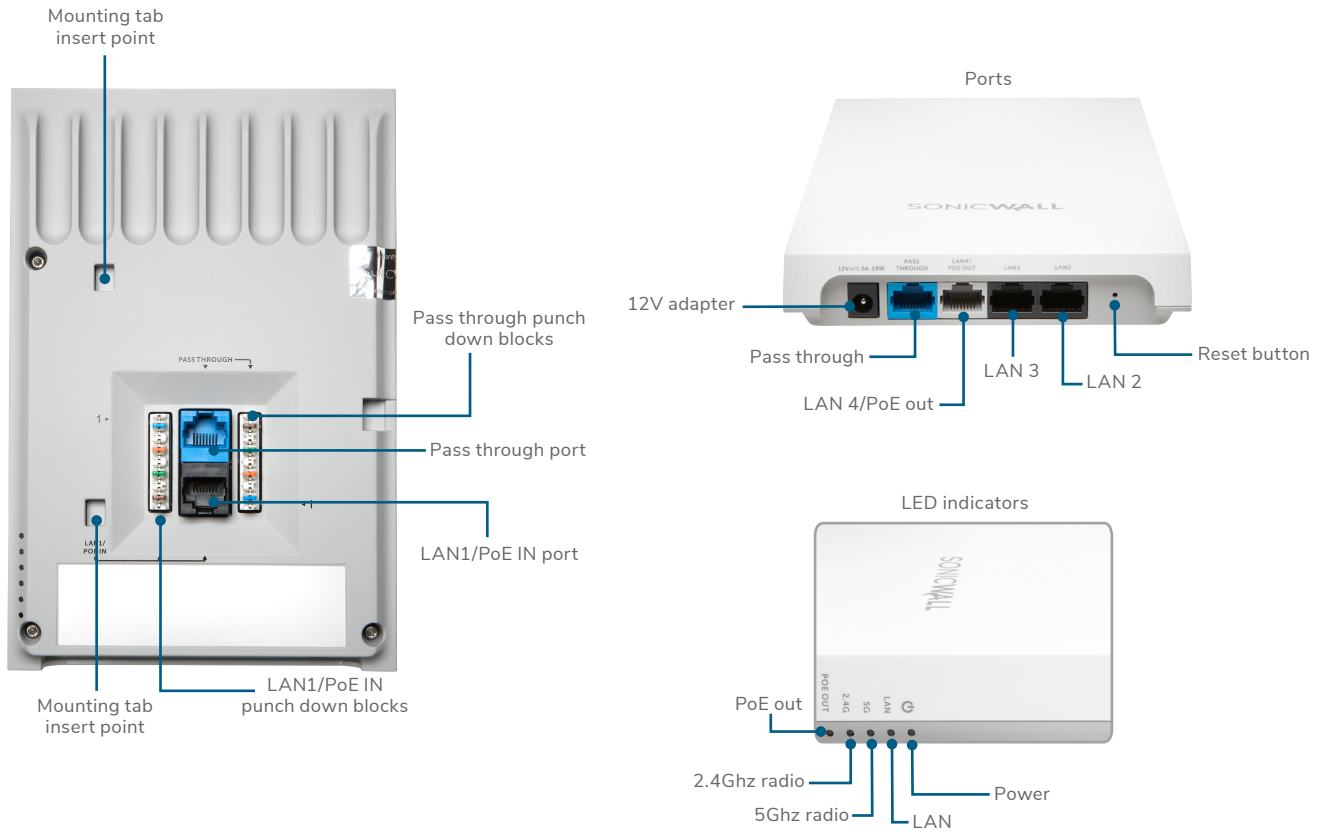


## RF coverage maps

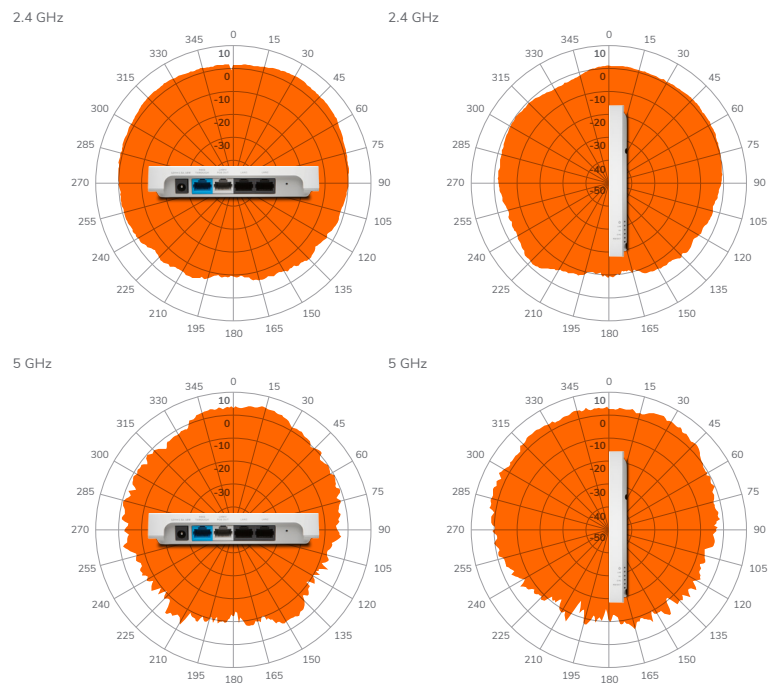

## SonicWave 231o – The Outdoor Mount AP

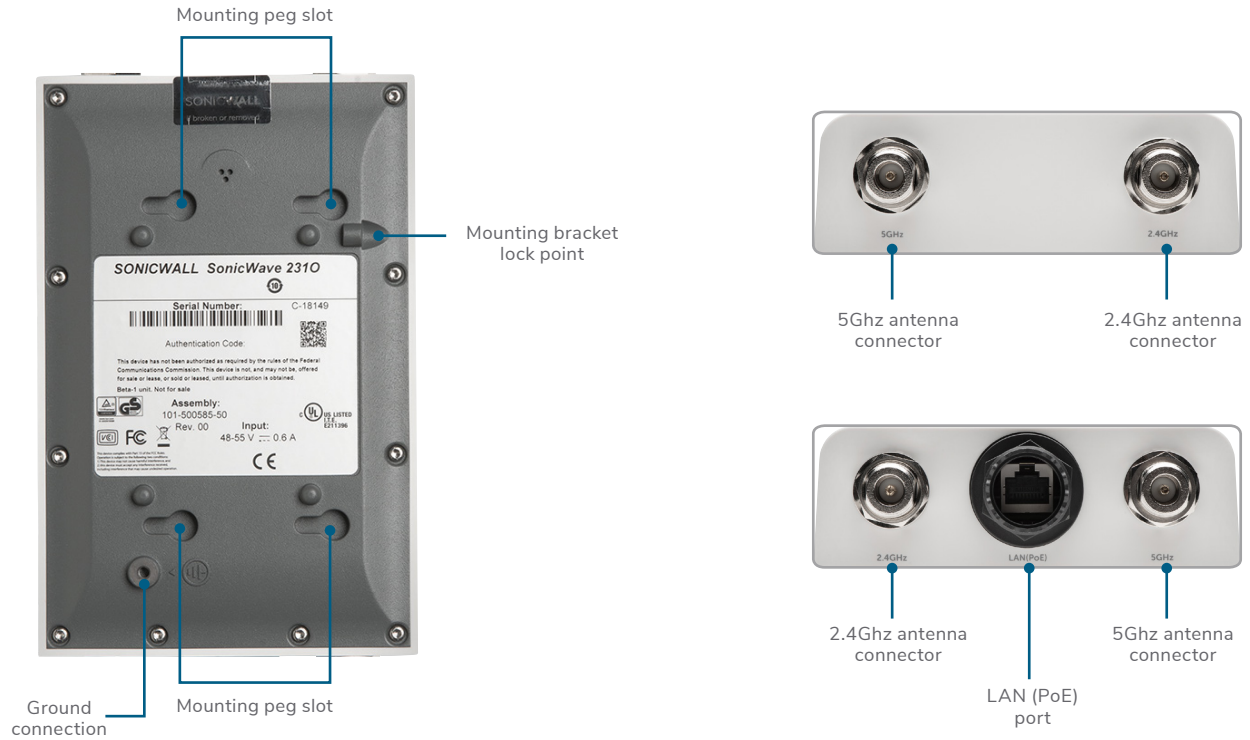


### RF coverage maps

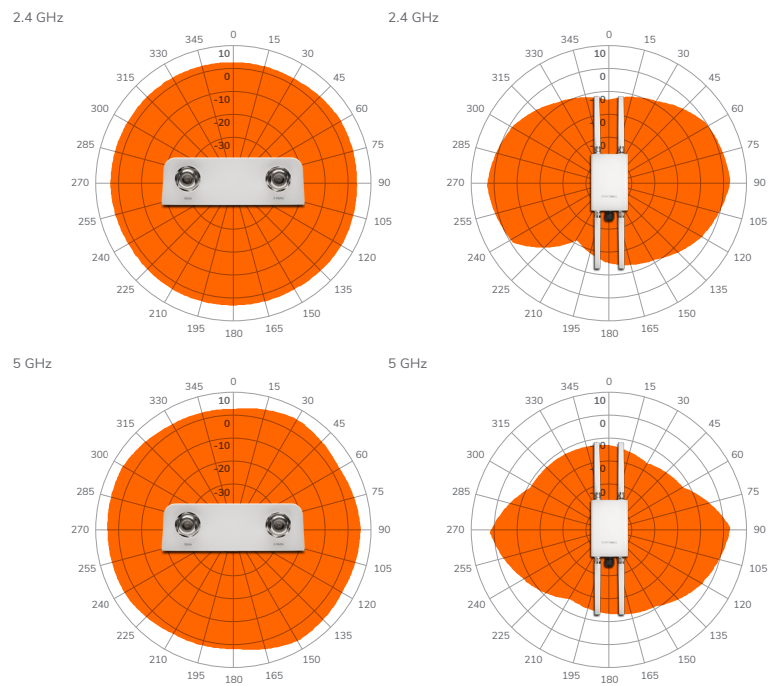





SonicWave 432e - The External Antenna AP

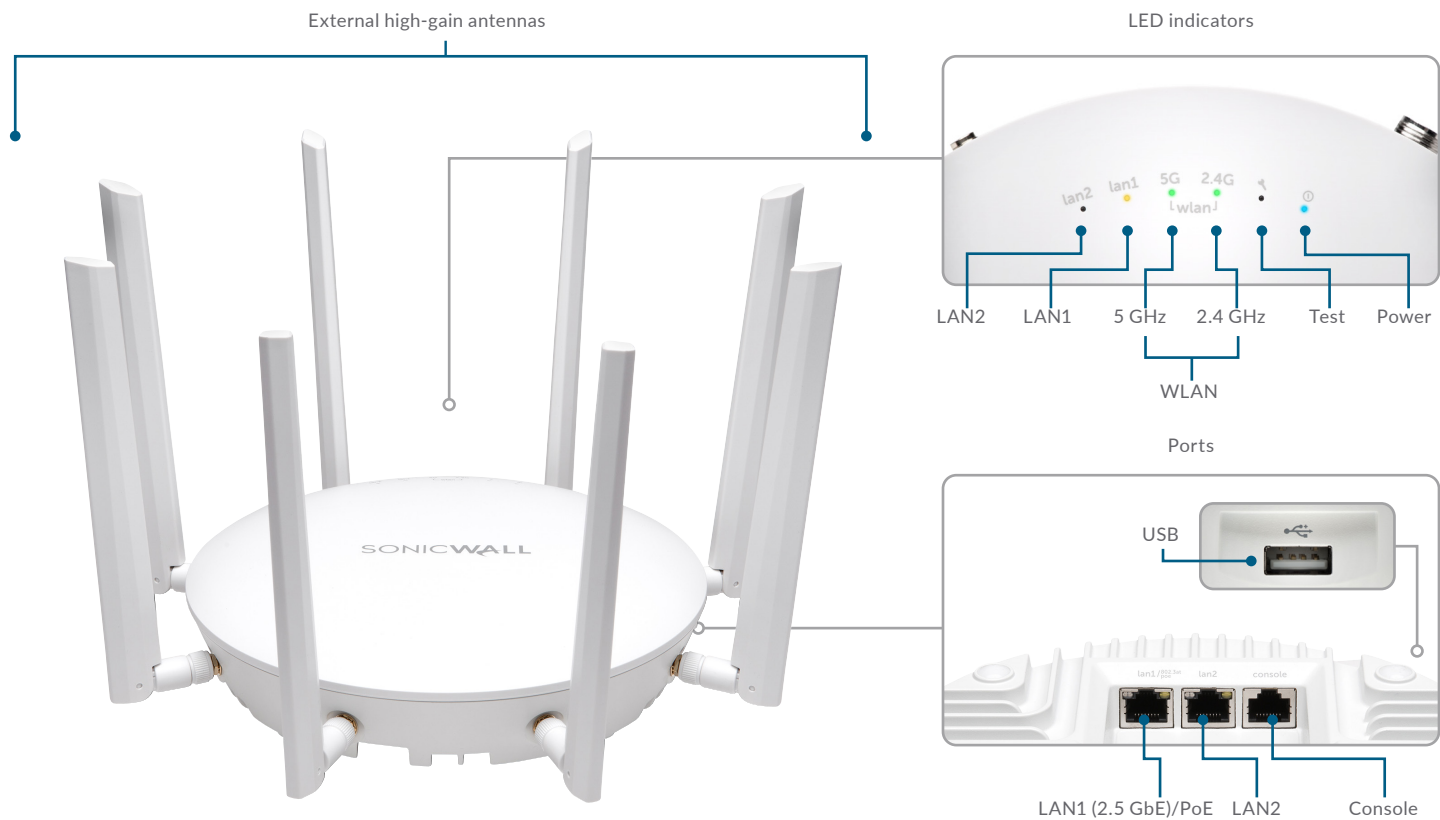


RF coverage maps

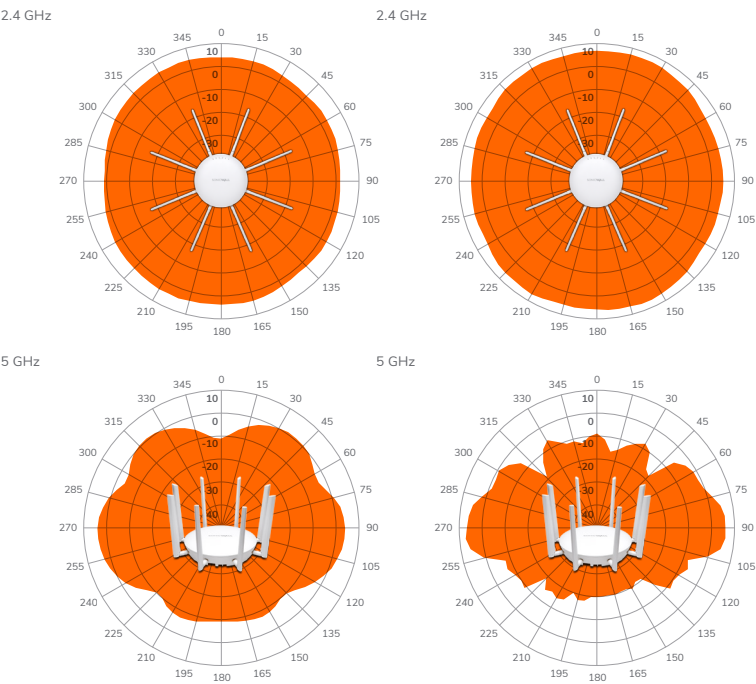


## SonicWave 432i - The Indoor AP

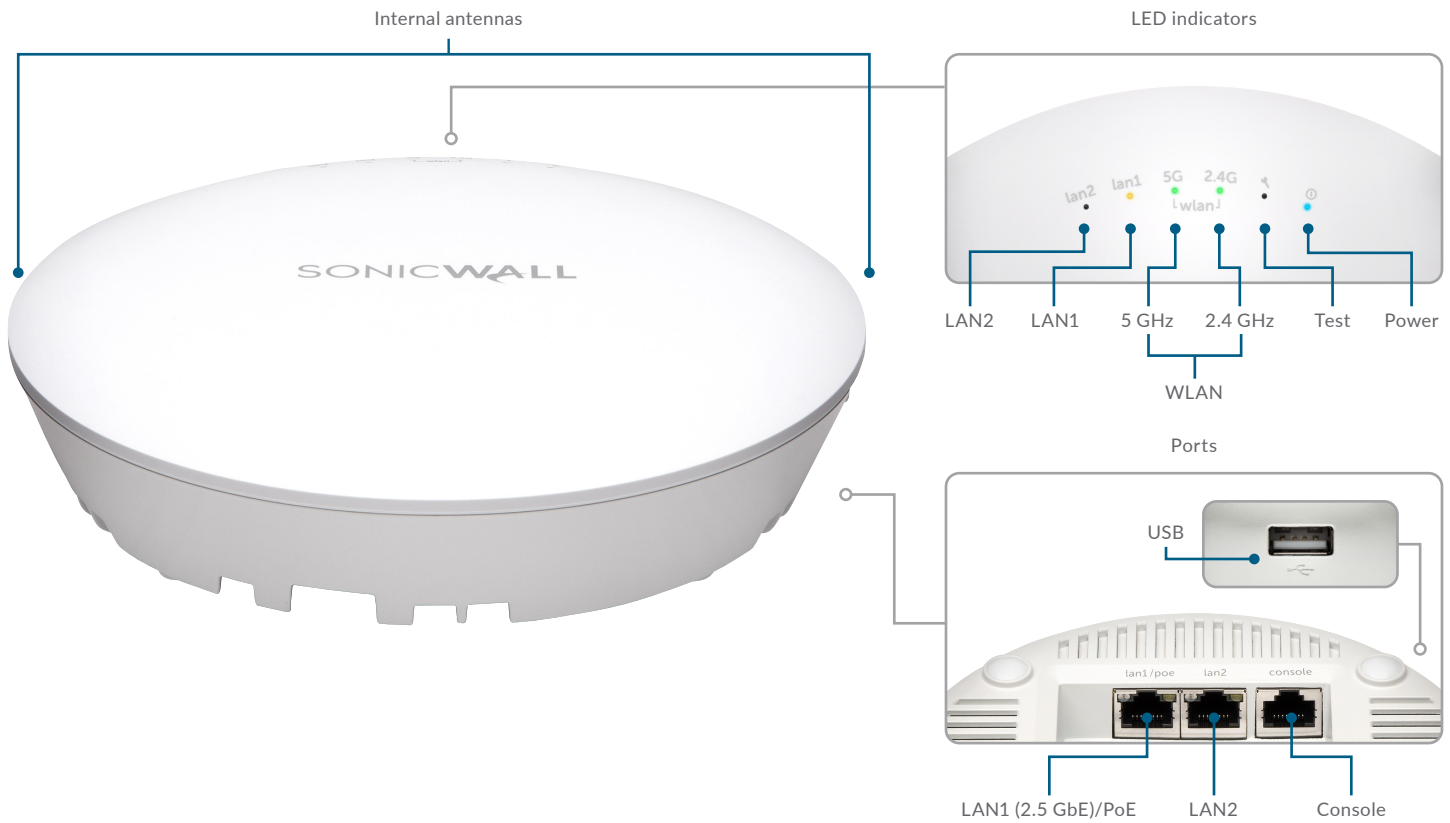


## RF coverage maps

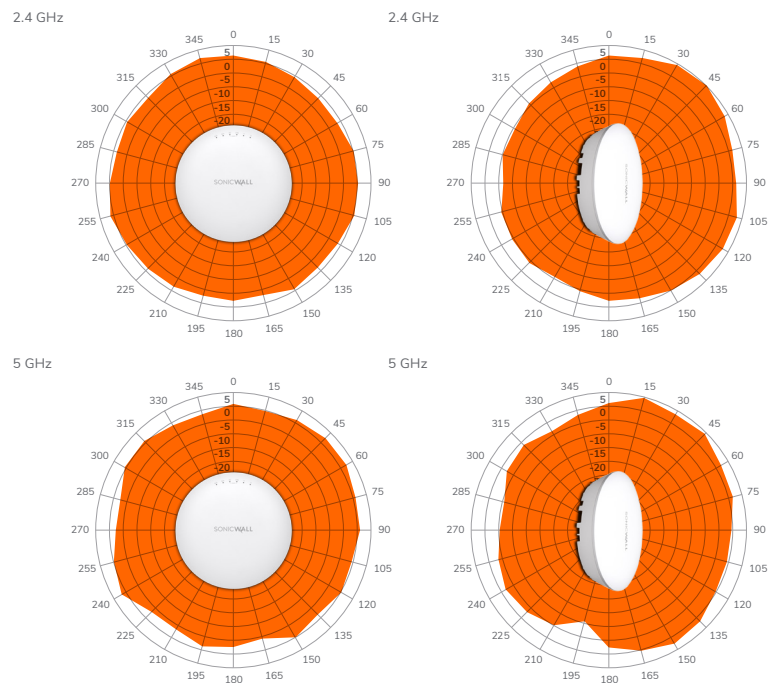

SonicWave 432o - The Outdoor AP

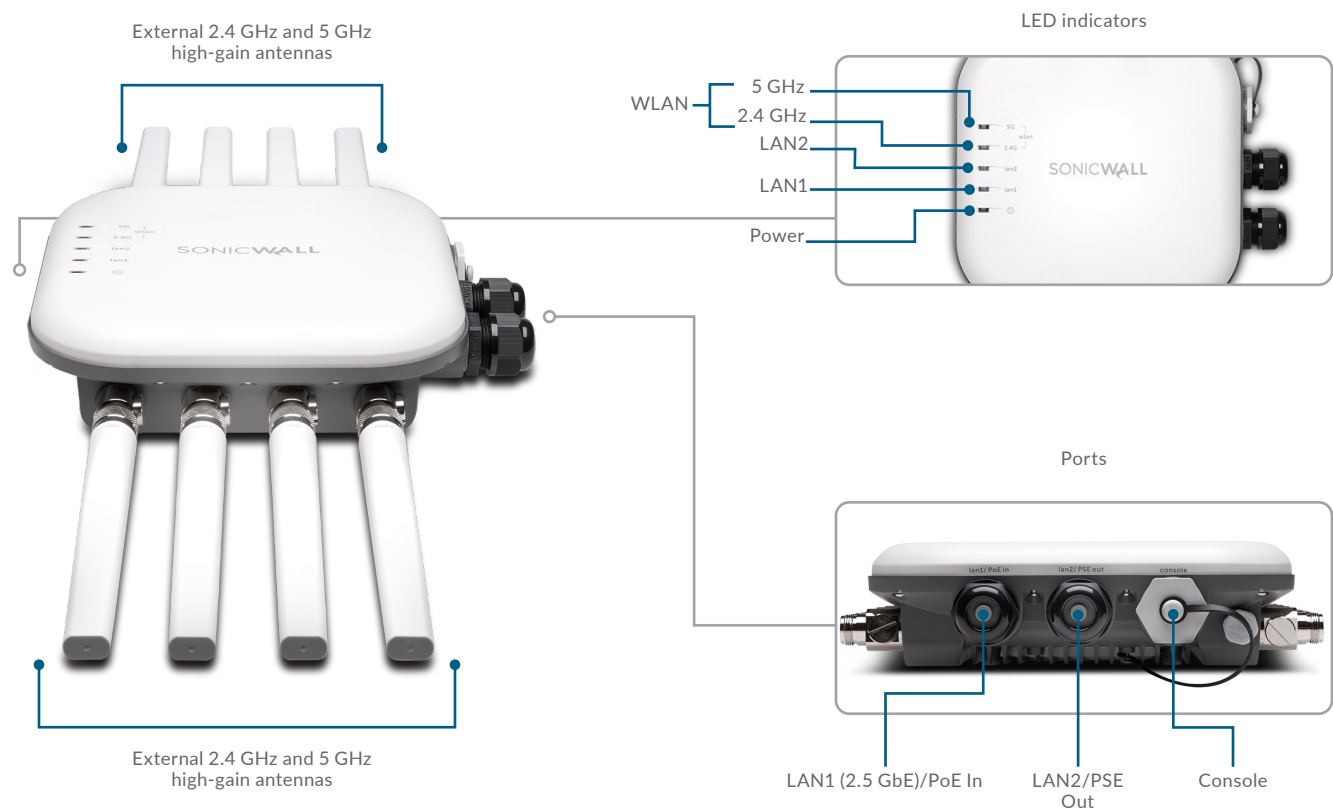

RF coverage maps

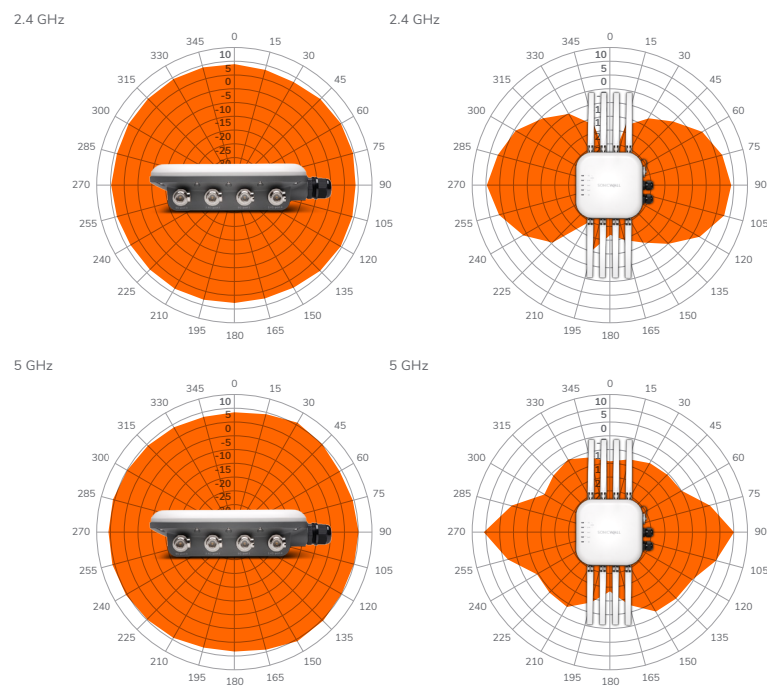



## SonicWave 200 Series Specifications

| HARDWARE SPECIFICATIONS                     | SONICWAVE 231c   | SONICWAVE 224w  | SONICWAVE 231o                             |
|---|--|---|--|
| Location                                    | Ceiling  | Wall  | Outdoor                                    |
| Radio                                       | 2x2 802.11ac Wave 2  |   |  |
| Dedicated 3rd scanning radio                | Yes  | No  | Yes  |
| USB 2.0                                     | Yes  | No  | No   |
| Bluetooth Low Energy (BLE) radio            | Yes  | Yes   | Yes  |
| Antenna type                                | Internal   | Internal  | Omni-Antenna                               |
| Dimensions                                  | 118mmx214mmx34m  | 122mmx188mmx18mm  | 190mmx120mmx42mm                           |
| Shipping dimension                          | 150mm x240mm x 73mm  | 150mm x240mm x 73mm   | 265mmx450mmx78mm                           |
| Unit weight                                 | 0.4 kg   | 0.4 kg  | 0.7 kg                                     |
| WEEE weight                                 | 0.7 Kg   | 0.7 Kg  | 2.0 kg                                     |
| Shipping weight                             | 0.7 Kg   | 0.7 Kg  | 2.0 kg                                     |
| PoE   | 802.3at<br>802.3af (compatible)  | 802.3at<br>802.3af (compatible)   | 802.3at<br>802.3af (compatible)            |
|   | DC 12V adapter (optional)  | DC 12V adapter (optional)   | (PoE sold separately)                      |
| Maximum power consumption (W)               | 12W  | 12W   | 12W  |
| Status indicators                           | 4  | 5   | 4  |
| Wired network ports                         | 1 x 10/100/1000 auto-sensing RJ-45   | 3 x 10/100/1000, 2x 10/100/1000 PoE pass through, 1 LAN PoE Out LAN ports | 1 x 10/100/1000 auto-sensing RJ-45         |
| Accessories included                        | Ceiling/wall mounting kit  |   | NEMA 4X Mounting kit and external antennas |
| Virtual access points/SSID group            | Up to 8 per access point   |   |  |
| Chassis                                     | Rectangle  |   |  |
| USB WAN card security clamp                 | Yes  | N/A   | N/A  |
| STANDARDS AND COMPLIANCE                    | SONICWAVE 231c   | SONICWAVE 224w  | SONICWAVE 231o                             |
| IEEE Standards                              | 802.11ac Wave 2, 802.11ac, 802.11n, 802.11g, 802.11b, 802.11a, 802.11e, 802.11i, 802.11r, 802.11k, 802.11v, 802.11w  |   |  |
| Compliance                                  | IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, IEEE 802.11ac, IEEE 802.11e, IEEE 802.11i, IEEE 802.3at, IEEE 802.3bz, WPA, TKIP, AES, IEEE 802.11r, IEEE 802.11k, IEEE 802.11v, IEEE 802.11w                |   |  |
| Wi-Fi Alliance Certification ID             | WFA78807   | WFA78829  | WFA78878                                   |
| Plenum rated                                | Yes  | N/A   | No   |
| Regulatory                                  | FCC, IC/ISED, CE, RCM, NCC, TELEC, KCC   |   |  |
| Safety Approvals                            | UL E211396, UL 62368-1, UL 60950-1<br>cUL CAN/CSA C22.2 No. 62368-1-14, CAN/CSA C22.2 No. 62368-1-14<br>EN 60950-1 Or EN 62368-1<br>IEC 60950-1, IEC 62368-1<br>Europe: EN 60950-1, EN 62368-1<br>Taiwan: CNS 1336-1 |   |  |
|   | USA: FCC Part 15C, 15E<br>Canada: ISED RSS-247<br>Europe: (RED) EN 300 328, EN 301 893<br>Aus/NZ: AS/NZs 4268<br>Taiwan: NCC LP002<br>Additional country approvals for Japan, Korea, China, India, Brazil            |   |  |
| Radio Approvals                             |  |   |  |
| EMI Approvals                               | USA: FCC P15B<br>Canada: ICES-003<br>Europe: EN 301 489-1, -17, EN 55032, EN 55024<br>Aus/NZ: CISPR 32<br>Japan: VCCI<br>Taiwan: CNS 13438   |   |  |
|   |  |   |  |
| Exposure Approvals                          | USA: FCC Part 2<br>Canada: RSS-102<br>Europe: EN 50385<br>Aus/Nz: ASNZS 2772   |   |  |
| MIMO  | MU-MIMO  |   |  |
| Max/Recommended connected clients per radio | 128/32   |   |  |
| USB WAN failover and load balancing         | Yes  | N/A   | N/A  |

## SonicWave 200 Series Specifications, cont'd

| ENVIRONMENTAL                  | SONICWAVE 231c  | SONICWAVE 224w                      | SONICWAVE 231o                             |
|--------------------------------|---|-------------------------------------|--|
| Temperature range              | 0° to 40°C  | 0° to 40°C                          | -30° to 60°C                               |
| Humidity                       | 0%~95% typical, elevation 50,000 ft   | 0%~95% typical, elevation 50,000 ft | 5%~90% typical                             |
| RADIO SPECIFICATIONS           | SONICWAVE 231c  | SONICWAVE 224w                      | SONICWAVE 231o                             |
| Radios                         | 3 radios - 5GHz, 2.4GHz and security radio  | 2 radios - 5GHz and 2.4GHz          | 3 radios - 5GHz, 2.4GHz and security radio |
| Frequency bands                | IEEE 802.11a/n/ac: 5.150-5.250 GHz (UNII-1), 5.250-5.350 GHz (UNII-2), 5.470-5.600, 5.660-5.725 GHz (UNII-2e), 5.725-5.825 GHz (UNII-3) |                                     |  |
| Operating channels*            | 2.4GHz channels : 1-13;<br>5 GHz channels: 36-64, 100-140, 149-165  |                                     |  |
| Transmit output power*         | Based on the regulatory domain product is installed in and specified by the system administrator  |                                     |  |
| Transmit power control         | Supported   |                                     |  |
| Data rates supported           | 867 Mbps for 5GHz radio,<br>400Mbps for 2.4GHz radio  |                                     |  |
| Modulation technology spectrum | 802.11ac: Orthogonal Frequency Division Multiplexing (OFDM)   |                                     |  |
| SECURITY                       | SONICWAVE 231c  | SONICWAVE 224w                      | SONICWAVE 231o                             |
| Data encryption                | WPA2; IPSec, 802.11i, WPA; 64/128/152-bit WEP, TKIP, AES, SSL VPN**   |                                     |  |
| AUTHENTICATION                 | SONICWAVE 231c  | SONICWAVE 224w                      | SONICWAVE 231o                             |
| Authentication                 | RADIUS, Active Directory, single sign-on (SSO)  |                                     |  |

\*When used with a SonicWall firewall

\*\*When used with SonicWall Secure Mobile Access Series appliance

## SonicWave 400 Series Specifications

| HARDWARE SPECIFICATIONS                     | SONICWAVE 432e   | SONICWAVE 432i                                | SONICWAVE 432o   |
|---|--|---|--|
| Location                                    | Indoor   | Indoor  | Outdoor  |
| Dimensions                                  | 8.5 (D) x 2.0 (H) in<br>21.6 (D) x 5.1 (H) cm  | 8.5 (D) x 2.0 (H) in<br>21.6 (D) x 5.1 (H) cm | 9.5 (W) x 9.3 (D) x 2.4 (H) in<br>24.1 (W) x 23.6 (D) x 6.1 (H) cm |
| Weight                                      | 1.1 kg / 2.5 lbs   | 1.0 kg / 2.2 lbs                              | 2.2 kg / 4.9 lbs   |
| WEEE weight                                 | 1.4 kg / 3.1 lbs   | 1.2 kg / 2.6 lbs                              | 4.1 kg / 9.1 lbs   |
| Shipping weight                             | 1.7 kg / 3.8 lbs   | 1.5 kg / 3.3 lbs                              | 4.7 kg / 10.4 lbs  |
| PoE injector                                |  | 802.3at                                       |  |
| Maximum power consumption (W)               | 18.8 W   | 18.8 W  | 21.2 W   |
| Status indicators                           | Six (6) LED (WLAN/Link) (LAN/Link) Power, Test   |   |  |
| Antennas                                    | 4+4 (SMA 2.4 GHz + TNC 5 GHz)  | 8 fully internal                              | 8 N-type dipole  |
| Wired network ports                         | (1) 10/100/1000 auto-sensing RJ-45 for Ethernet and Power over Ethernet (PoE); (1) 100/1000/2.5 GbE auto-sensing RJ-45 for Ethernet; (1) RJ-45 console; (1) USB 2.0 (except 432o)                                    |   |  |
| Accessories included                        | Wall/ceiling mount kit   |   |  |
| Virtual access points/SSID group            | Up to 8 per access point   |   |  |
| Chassis                                     | UL 1024 plenum rated   |   |  |
| USB WAN card security clamp                 | Yes  | Yes   | N/A  |
| STANDARDS AND COMPLIANCE                    | SONICWAVE 432e   | SONICWAVE 432i                                | SONICWAVE 432o   |
| IEEE Standards                              | 802.11ac Wave 2, 802.11ac, 802.11n, 802.11g, 802.11b, 802.11a, 802.11e, 802.11i, 802.11r, 802.11k, 802.11v, 802.11w  |   |  |
| Compliance                                  | IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, IEEE 802.11ac, IEEE 802.11e, IEEE 802.11i, IEEE 802.3at, IEEE 802.3bz, WPA, TKIP, AES, IEEE 802.11r, IEEE 802.11k, IEEE 802.11v, IEEE 802.11w                |   |  |
| Wi-Fi Alliance Certification ID             | WFA74776   | WFA74777                                      | WFA74189   |
| Regulatory                                  | FCC/ICES Class B, CE, RCM/ACMA, VCCI Class B, TELEC, BSMI, NCC, MSIP, ANATEL, Customs Union, RoHS (Europe/China), WEEE   |   |  |
| Safety Approvals                            | UL E211396, UL 62368-1, UL 60950-1<br>cUL CAN/CSA C22.2 No. 62368-1-14, CAN/CSA C22.2 No. 62368-1-14<br>EN 60950-1 Or EN 62368-1<br>IEC 60950-1, IEC 62368-1<br>Europe: EN 60950-1, EN 62368-1<br>Taiwan: CNS 1336-1 |   |  |
| Radio Approvals                             | USA: FCC Part 15C, 15E<br>Canada: ICES RSS-247<br>Europe: (RED) EN 300 328, EN 301 893<br>Aus/NZ: AS/NZs 4268<br>Taiwan: NCC LP002<br>Additional country approvals for Japan, Korea, China, India, Brazil            |   |  |
| EMI Approvals                               | USA: FCC P15B<br>Canada: ICES-003<br>Europe: EN 301 489-1, -17, EN 55032, EN 55024<br>Aus/NZ: CISPR 32<br>Japan: VCCI<br>Taiwan: CNS 13438   |   |  |
| Exposure Approvals                          | USA: FCC Part 2<br>Canada: RSS-102<br>Europe: EN 50385<br>Aus/Nz: AS/NZS 2772  |   |  |
| MIMO  | MU-MIMO 4x4 (4 streams)  |   |  |
| Max/Recommended connected clients per radio | 128/48   |   |  |
| Safety                                      | UL, cUL, TUV/GS, CB, CE, BSMI, Mexico CoC, Customs Union   |   |  |
| USB WAN failover and load balancing         | Yes  | Yes   | N/A  |

## SonicWave 400 Series Specifications, cont'd

| ENVIRONMENTAL                  | SONICWAVE 432e  | SONICWAVE 432i | SONICWAVE 432o            |
|--------------------------------|---|----------------|---------------------------|
| Temperature range              | 32 to 104°F, 0 to 40°C  |                | -40 to 140°F, -40 to 60°C |
| Humidity                       | 10 - 95%, non-condensing  |                |                           |
| RADIO SPECIFICATIONS           | SONICWAVE 432e  | SONICWAVE 432i | SONICWAVE 432o            |
| Radios                         | Dual: 4x4 11n + 4x4 11ac MU-MIMO; Dedicated third scanning radio; Bluetooth Low Energy radio  |                |                           |
| Frequency bands                | 802.11a: 5.180-5.825 GHz<br>802.11b/g: 2.412-2.472 GHz<br>802.11n: 2.412-2.472 GHz, 5.180-5.825 GHz<br>802.11ac: 2.412-2.472 GHz, 5.180-5.825 GHz   |                |                           |
| Operating channels             | 802.11a: US and Canada 12, Europe 11, Japan 4, Singapore 4, Taiwan 4<br>802.11b/g: US and Canada 1-11, Europe 1-13, Japan 1-14 (14-802.11b only)<br>802.11n (2.4 GHz): US and Canada 1-11, Europe 1-13, Japan 1-13<br>802.11n (5 GHz): US and Canada 36-48/149-165, Europe 36-48, Japan 36-48, Spain 36-48/52-64<br>802.11ac: US and Canada 36-48/149-165, Europe 36-48, Japan 36-48, Spain 36-48/52-64   |                |                           |
| Transmit output power          | Based on the regulatory domain specified by the system administrator  |                |                           |
| Transmit power control         | Supported   |                |                           |
| Data rates supported           | 802.11a: 6,9,12,18,24,36,48,54 Mbps per channel<br>802.11b: 1,2,5.5,11 Mbps per channel<br>802.11g: 6,9,12,18,24,36,48,54 Mbps per channel<br>802.11n: 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2, 15, 30, 45, 60, 90, 120, 135, 150 Mbps per channel<br>802.11ac: 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2, 86.7, 96.3, 15, 30, 45, 60, 90, 120, 135, 150, 180, 200, 32.5, 65, 97.5, 130, 195, 260, 292.5, 325, 390, 433.3, 65, 130, 195, 260, 390, 520, 585, 650, 780, 866.7, 1040, 1170, 1300, 1560, 1733.4 Mbps per channel |                |                           |
| Modulation technology spectrum | 802.11a: Orthogonal Frequency Division Multiplexing (OFDM)<br>802.11b: Direct Sequence Spread Spectrum (DSSS)<br>802.11g: Orthogonal Frequency Division Multiplexing (OFDM)/Direct Sequence Spread Spectrum (DSSS)<br>802.11n: Orthogonal Frequency Division Multiplexing (OFDM)<br>802.11ac: Orthogonal Frequency Division Multiplexing (OFDM)   |                |                           |
| SECURITY                       | SONICWAVE 432e  | SONICWAVE 432i | SONICWAVE 432o            |
| Data encryption                | WPA2, IPSec*, 802.11i, WPA, 64/128/152-bit WEP, TKIP, AES, SSL VPN**  |                |                           |
| AUTHENTICATION                 | SONICWAVE 432e  | SONICWAVE 432i | SONICWAVE 432o            |
| Authentication                 | RADIUS, Active Directory, single sign-on (SSO)  |                |                           |

\*When used with a SonicWall firewall

\*\*When used with SonicWall Secure Mobile Access Series appliance

## SonicWave Feature Summary

| SUPERIOR USER EXPERIENCE                          |   |
|---|---|
| Feature   | Description   |
| High-speed wireless performance and range         | SonicWave access points are based on the 802.11ac Wave 2 standard, which can achieve a PHY rate of up to 2.34 Gbps while maintaining a higher performance level at greater ranges depending on environmental conditions.  |
| Enhanced signal quality                           | The 802.11ac standard operates in the 5 GHz frequency band, which has fewer wireless devices competing for airspace and is therefore less prone to signal interference.   |
| Increased wireless reliability                    | The increase in bandwidth capacity and greater number of spatial streams combined with MU-MIMO and the improved processing offered by 802.11ac, result in more reliable wireless coverage.  |
| MU-MIMO   | MU-MIMO (Multi-user, multiple-input, multiple-output) technology enables simultaneously transmission from the access point to numerous wireless clients instead of just one.  |
| Band steering                                     | Band steering improves the user experience by steering dual-band clients to automatically connect to the less crowded 5 GHz frequency band leaving the more crowded 2.4 GHz frequency for legacy clients.   |
| Beamforming                                       | Beamforming improves wireless performance and range by focusing the wireless signal on an individual client instead of spreading the data transmission equally in all directions.   |
| AirTime Fairness                                  | AirTime Fairness distributes air time equally among connected clients, ensuring faster clients get more data in their time while slower clients receive less.   |
| Wireless mesh                                     | A wireless mesh enables to extend wifi coverage instantly without requiring cables.   |
| FairNet wireless bandwidth allocation             | FairNet guarantees a minimum amount of bandwidth to each wireless client in order to prevent disproportionate bandwidth consumption by a single user.   |
| COMPREHENSIVE WIRELESS SECURITY                   |   |
| Feature   | Description   |
| Reassembly-Free Deep Packet Inspection technology | SonicWall next-generation firewalls tightly integrate Reassembly-Free Deep Packet Inspection® (RFDPI) technology to scan all inbound and outbound traffic on wired and wireless networks and eliminate intrusions, ransomware, spyware, viruses and other threats before they enter the network.                    |
| Real-Time Deep Memory Inspection (RTDMI)          | This patent-pending cloud-based technology detects and blocks malware that does not exhibit any malicious behavior and hides its weaponry via encryption. By forcing malware to reveal its weaponry into memory, the RTDMI engine proactively detects and blocks mass-market, zero-day threats and unknown malware. |
| SSL/TLS decryption and inspection                 | The SonicWall firewall decrypts and inspects SSL/TLS traffic on the fly, without proxying, for malware, intrusions and data leakage, and applies application, URL and content control policies in order to protect against threats hidden in SSL/TLS-encrypted traffic.   |
| Dedicated third scanning radio                    | Most SonicWave access points include a dedicated that performs continual scanning of the wireless spectrum for rogue access points plus additional security functions that help with PCI compliance.  |
| Wireless intrusion detection and prevention       | Wireless intrusion detection and prevention scans the wireless network for unauthorized (rogue) access points and then the managing firewall automatically takes countermeasures, such as preventing any connections to the device.   |
| Wireless guest services                           | Wireless guest services enables administrators to provide internet-only access for guest users. This access is separate from internal access and requires guest users to securely authenticate to a virtual access point before access is granted.  |
| Lightweight hotspot messaging                     | Lightweight hotspot messaging extends the SonicWall wireless guest services model of differentiated internet access for guest users, enabling extensive customization of the authentication interface and the use of any kind of authentication scheme.   |
| Captive portal                                    | Captive portal forces a user's device to view a page and provide authentication through a web browser before internet access is granted.  |
| Virtual access point segmentation                 | Administrators can create up to eight SSIDs on the same access point, each with its own dedicated authentication and privacy settings. This provides logical segmentation of secure wireless network traffic and secure customer access.  |

## COMPREHENSIVE WIRELESS SECURITY, CONT'D

| Feature                              | Description   |
|--------------------------------------|---|
| Cloud ACL                            | An extension to local ACL, cloud ACL is deployed and managed from a centralized RADIUS server in the cloud. This eliminates local ACL scalability issues, enabling organizations to configure authentication accounts based on their specific requirements. In addition, MAC authentication can be enforced on all WiFi-enabled devices even if they are not capable of 802.1x support. This adds another layer of protection to the wireless network.  |
| Multi-RADIUS authentication          | Multi-RADIUS Authentication provides enterprise-class redundancy by enabling organizations to deploy multiple RADIUS servers in active/passive mode for high availability. Should the primary RADIUS server fail, the managing SonicWall firewall discovers the failure and switches to the secondary server, ensuring wireless devices can continue to authenticate. Further, multi-RADIUS authentication can be supported on each virtual access point and configured for WPA-Enterprise, WPA2-Enterprise or WPA2-Auto-Enterprise mode. |
| Granular security policy enforcement | Network administrators can implement and enforce firewall rules on all wireless traffic and control all wireless client communications to any host on the network — wired or wireless.  |

## SIMPLIFIED DEPLOYMENT AND CENTRALIZED MANAGEMENT

| Feature                                     | Description  |
|---|--|
| Simplified setup and centralized management | SonicWave access points are automatically detected, provisioned and updated by the cloud or through SonicWall next-gen firewalls. WLAN administration is also handled directly from the managing firewall, simplifying setup and centralizing ongoing management.      |
| WiFi planner                                | To optimize access point placement before deployment, the WiFi planning tool provides comprehensive visualization of the WiFi environment including obstacles that impact signal performance plus both covered and non-covered zones.                                  |
| Floor plan view                             | Floor plan view is a WiFi planning tool that enables users to upload or create a floor plan and place SonicWave access points appropriately to ensure required wireless coverage.  |
| Topology view                               | Topology view is a WiFi tool that automatically maps devices and how they are connected in the wireless network architecture in order to aid in troubleshooting.   |
| Plenum rated                                | SonicWave access points are plenum rated for safe installation in air-handling spaces such as in or above suspended ceilings.  |
| Multiple power options                      | SonicWave access points are powered from a SonicWall Power over Ethernet (PoE) Injector or third-party device for easy deployment where electrical outlets are not readily accessible.   |
| Light controls                              | With dimmable LEDs (excluding power), SonicPoints fit perfectly into environments that need discreet wireless coverage.  |
| Broad standards and protocols support       | SonicWave access points support a wide range of wireless standards and security protocols, including 802.11 a/b/g/n/ac, WPA2 and WPA. This allows organizations to leverage prior investments in devices that are incapable of supporting higher encryption standards. |

## LOW TOTAL COST OF OWNERSHIP

| Feature              | Description   |
|----------------------|---|
| Low TCO              | Features such as simplified deployment, single pane of glass management for both wireless and security, and no need to purchase a separate wireless controller drastically reduce an organization's cost to add wireless into a new or existing network infrastructure. |
| MiFi extender        | MiFi Extender enables the attachment of a 3G/4G/LTE modem to the SonicWave access point for use as either the primary WAN or as a secondary failover WAN link for business continuity.  |
| Bluetooth Low Energy | SonicWave access points include a Bluetooth Low Energy radio that enables the use of ISM (industrial, scientific and medical) applications for healthcare, fitness, retail beacons, security and home entertainment over a low energy link.                             |
| USB port             | Access points with USB port supports 3G/4G failover. Plug in a dongle to the port and network continues to function over cellular connection, in case of WiFi network outage.   |
| Green access points  | SonicWave access points reduce costs by supporting green access points, which enables both radios to enter sleep mode for power saving when no clients are actively connected. The access point will exit sleep mode once a client attempts to associate with it.       |










## SonicWave 200 Series Access Points and Accessories Ordering Information

| SONICWAVE 200 Series  | SKU         |   |
|---|-------------|---|
| SonicWave 231c Wireless Access Point with Secure Cloud WiFi Management and Support 1YR (No PoE)                     | 02-SSC-2095 |    |
| SonicWave 231c Wireless Access Point with Secure Cloud WiFi Management and Support 3YR (No PoE)                     | 02-SSC-2097 |   |
| SonicWave 231c Wireless Access Point with Secure Cloud WiFi Management and Support 5YR (No PoE)                     | 02-SSC-2096 |   |
| SonicWave 231c Wireless Access Point Secure Upgrade Plus with Secure Cloud WiFi Management and Support 3YR (No PoE) | 02-SSC-2103 |   |
| SonicWave 231c Wireless Access Point Secure Upgrade Plus with Secure Cloud WiFi Management and Support 5YR (No PoE) | 02-SSC-2102 |   |
| SonicWave 224w Wireless Access Point with Secure Cloud WiFi Management and Support 1YR (No PoE)                     | 02-SSC-2107 |    |
| SonicWave 224w Wireless Access Point with Secure Cloud WiFi Management and Support 3YR (No PoE)                     | 02-SSC-2109 |   |
| SonicWave 224w Wireless Access Point with Secure Cloud WiFi Management and Support 5YR (No PoE)                     | 02-SSC-2108 |   |
| SonicWave 224w Wireless Access Point Secure Upgrade Plus with Secure Cloud WiFi Management and Support 3YR (No PoE) | 02-SSC-2111 |   |
| SonicWave 224w Wireless Access Point Secure Upgrade Plus with Secure Cloud WiFi Management and Support 5YR (No PoE) | 02-SSC-2110 |   |
| SonicWave 231o Wireless Access Point with Secure Cloud WiFi Management and Support 1YR (No PoE)                     | 02-SSC-2115 |    |
| SonicWave 231o Wireless Access Point with Secure Cloud WiFi Management and Support 3YR (No PoE)                     | 02-SSC-2117 |   |
| SonicWave 231o Wireless Access Point with Secure Cloud WiFi Management and Support 5YR (No PoE)                     | 02-SSC-2116 |   |
| SonicWave 231o Wireless Access Point Secure Upgrade Plus with Secure Cloud WiFi Management and Support 3YR (No PoE) | 02-SSC-2119 |   |
| SonicWave 231o Wireless Access Point Secure Upgrade Plus with Secure Cloud WiFi Management and Support 5YR (No PoE) | 02-SSC-2118 |   |
| SonicWave 224w/231c Power Supply  | 01-SSC-9146 |    |
| SonicWave Multi-Gigabit 802.3at PoE Injector  | 01-SSC-5545 |   |
| SonicWave 231o Sector Antenna S122-12 Single Band 2.4GHz 12dBi (No RF Cable)  | 02-SSC-0504 |  |
| SonicWave 231o Sector Antenna S152-15 Single Band 5GHz 15dBi (No RF Cable)  | 02-SSC-0505 |   |

For a complete list of SKUs please contact your local SonicWall reseller

## SonicWave 400 Series Access Points and Accessories Ordering Information

| SONICWAVE 400 Series  | SKU         |   |
|---|-------------|---|
| SonicWave 432i Wireless Access Point with Secure Cloud WiFi Management and Support 1YR (No PoE)                     | 01-SSC-2493 |    |
| SonicWave 432i Wireless Access Point with Secure Cloud WiFi Management and Support 3YR (No PoE)                     | 01-SSC-2494 |   |
| SonicWave 432i Wireless Access Point with Secure Cloud WiFi Management and Support 5YR (No PoE)                     | 01-SSC-2492 |   |
| SonicWave 432i Wireless Access Point Secure Upgrade Plus with Secure Cloud WiFi Management and Support 3YR (No PoE) | 01-SSC-2487 |   |
| SonicWave 432i Wireless Access Point Secure Upgrade Plus with Secure Cloud WiFi Management and Support 5YR (No PoE) | 01-SSC-2486 |   |
| SonicWave 432e Wireless Access Point with Secure Cloud WiFi Management and Support 1YR (No PoE)                     | 01-SSC-2509 |    |
| SonicWave 432e Wireless Access Point with Secure Cloud WiFi Management and Support 3YR (No PoE)                     | 01-SSC-2504 |   |
| SonicWave 432e Wireless Access Point with Secure Cloud WiFi Management and Support 5YR (No PoE)                     | 01-SSC-2503 |   |
| SonicWave 432e Wireless Access Point Secure Upgrade Plus with Secure Cloud WiFi Management and Support 3YR (No PoE) | 01-SSC-2562 |   |
| SonicWave 432e Wireless Access Point Secure Upgrade Plus with Secure Cloud WiFi Management and Support 5YR (No PoE) | 01-SSC-2559 |   |
| SonicWave 432o Wireless Access Point with Secure Cloud WiFi Management and Support 1YR (No PoE)                     | 01-SSC-2510 |    |
| SonicWave 432o Wireless Access Point with Secure Cloud WiFi Management and Support 3YR (No PoE)                     | 01-SSC-2512 |   |
| SonicWave 432o Wireless Access Point with Secure Cloud WiFi Management and Support 5YR (No PoE)                     | 01-SSC-2511 |   |
| SonicWave 432o Wireless Access Point Secure Upgrade Plus with Secure Cloud WiFi Management and Support 3YR (No PoE) | 01-SSC-2570 |   |
| SonicWave 432o Wireless Access Point Secure Upgrade Plus with Secure Cloud WiFi Management and Support 5YR (No PoE) | 01-SSC-2569 |   |
| SonicWave Multi-Gigabit 802.3at PoE+ Injector   | 01-SSC-2450 |    |
| SonicWave 432o Sector Antenna S124-12 (Single Band 2.4 GHz)   | 01-SSC-2461 |    |
| SonicWave 432o Sector Antenna S154-15 (Single Band 5 GHz)   | 01-SSC-2462 |   |
| SonicWave 432o Panel Antenna P254-07 (Dual Band)  | 01-SSC-2465 |    |
| SonicWave 432o Panel Antenna P254-13 (Dual Band)  | 01-SSC-2467 |  |

For a complete list of SKUs please contact your local SonicWall reseller

For info on SonicPoint APs, [click here](#).

### Partner Enabled Services

Need help to plan, deploy or optimize your SonicWall solution? SonicWall Advanced Services Partners are trained to provide you with world class professional services. Learn more at [www.sonicwall.com/PES](http://www.sonicwall.com/PES).

## About SonicWall

SonicWall has been fighting the cybercriminal industry for over 27 years defending small and medium businesses, enterprises and government agencies worldwide. Backed by research from SonicWall Capture Labs, our award-winning, real-time breach detection and prevention solutions secure more than a million networks, and their emails, applications and data, in over 215 countries and territories. These organizations run more effectively and fear less about security. For more information, visit [www.sonicwall.com](http://www.sonicwall.com) or follow us on [Twitter](#), [LinkedIn](#), [Facebook](#) and [Instagram](#).